

Diesel Land Rover Pre - 1983

Instructions for changing Land Rover hair pin series wired glow plugs to parallel wired probe type glow plugs.

- 1) Remove existing wiring between ballast resistor and glow plugs also between glow plug and earth discard. (fig 1.1)
- 2) Remove existing hair pin type glow plugs from engine and discard
- 3) Fit new probe type glow plugs to engine, tighten to recommended torque.
- 4) Using new wiring supplied, wire glow plugs and ballast resistor as per fig 1.2, care should be taken to ensure that all terminal nuts are properly tightened.
- 5) Start engine using normal method.

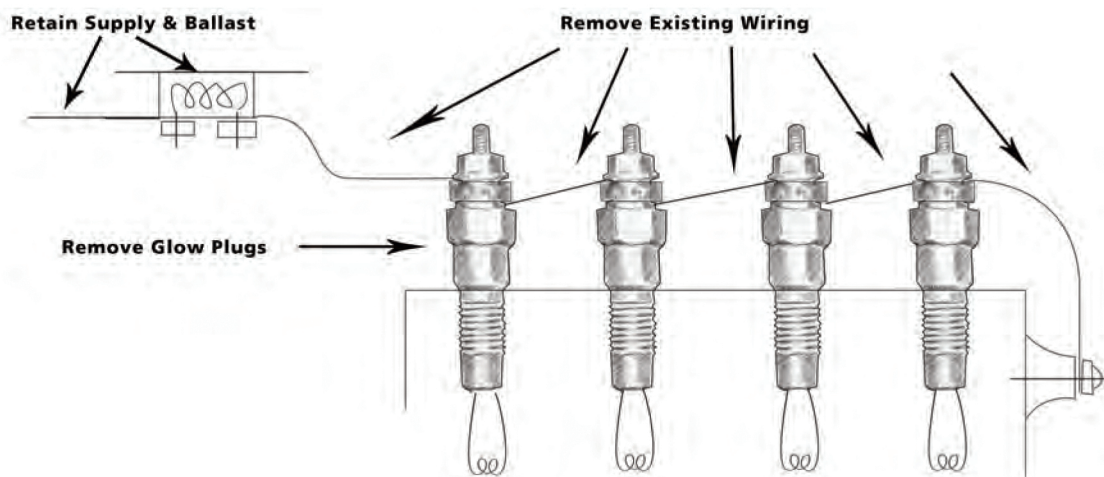


Fig 1.1 - Existing System

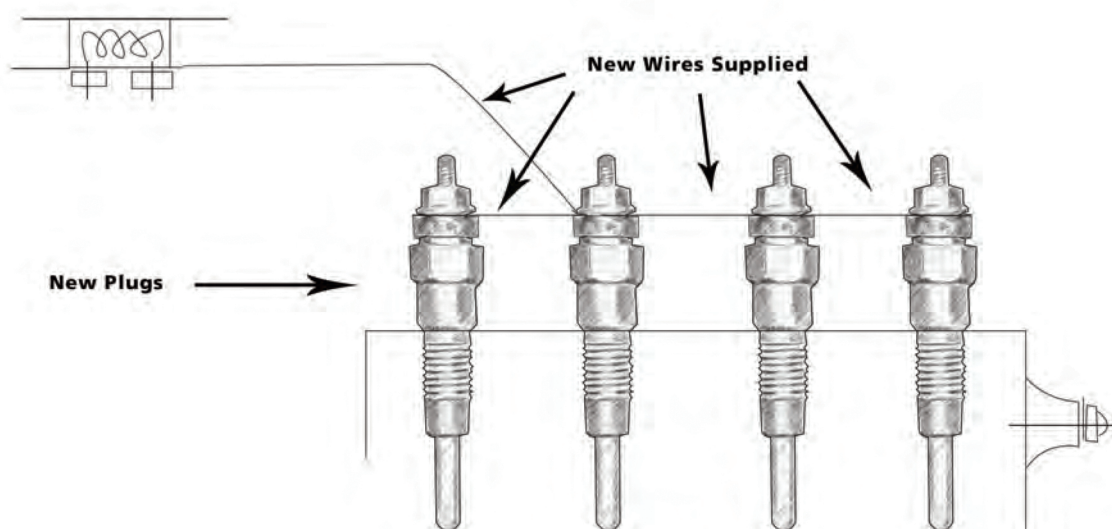


Fig 1.2 New System